



Multifunctional LED DVR



User Manual

Fashionable Security LED DVR



This user manual details how to use this product, while providing detailed information to you, including use, operation. Read this manual carefully before use and fully understand. Please save this manual, we hope that this product will meet your needs and provide long-term service to you!

Product Warranty
This product is in line with the standards recommended by authorities like FCC&CE, customers use it with security guarantees.

I. Introduction of video security night light
This product is a multi-functional high-new technology product, which has an external TF card memory HD 30 (1280x720) and remote control of H.264 format video surveillance night-light, into which integrates camera, sound recording, motion detection, web chat, night light. This product is equipped with high-capacity batteries that are available for more than 20 hours continuous video recording or more than 30 hours of continuous

voice recording, or up to 14 days motion detection surveillance. In addition, it has 5 million-pixel high-definition video, audio, night light, and supports up to 32GB TF card, available to work long hours and more convenient for remote operation. With strong concealment, it is the best forensics tool for theft of home and monitoring.

II. Structure of product



- 1 5million camera
- 2 receiving head of Remote control
- 3 F10LED light
- 4 battery slot
- 5 USB interface
- 6 power switch
- 7 TF slot

III. Operating instructions

1. Open the rear cover, insert TF card, open " ON " bo
2. With the controller aiming at the Receiving head of machine, press () to boot' blue light will be on' enter the standby state. (If no card, blue light flashes 3 seconds before shutdown)

3. Press () to record video' Blue light flashes 3 times before off, then enter into working state' (7minutes 1 section) , press () to stop' blue light will be on.

4. Press () to record voice' Blue light flashes 2times before off, then enter into working state' (30 minutes 1 section) , press () to stop' blue light will be on.

5. Press () to Photograph, blue light slowly flashes one time.

6 .Motion detection, press (), blue light flashes three times to enter Automatic shooting function' press () to stop' blue light will be on.

7. In any state press () Night Light will be on' press again off

8 .Press () to shut down' blue light will be off.

9 .In the state of ON' insert USB cable then remote boot. At this time machine enter into U disk mode.

10 .Network camera functions: Before use please follow the steps to install software in CD. After installation, in the state of ON, press () by remote control' connect to computer with USB cable. Now enter into Mode PC CAM

11. Charging: Switch to OFF end, insert the USB charger, red light will be on, red light will be off after fully charged. Can connect USB cable to computer to charge also.

12. Reset: When the product is down because of illegal operation or other unknown reasons, toggle switch to OFF state, then switch to ON can reset it.

13. When is battery low, blue light flashes, you should immediately charge, meanwhile, when there is no electricity, the file will automatically be saved.

14. Time setting : build a "time " text file in machine's memory card, open text file and input current date time, use spacebar to separate, such as: 2012 06 02 12:00 , save the document, reboot, recording time is currently compiling time.

IV. File storage and playback

After completed the operations like video recording' dial the switch to ON' connect USB cable' copy or cut the files inside into computer to play, meanwhile, can remove TF card and use card reader to read data. Media player/KM player is recommended.

Parameters

Pixel	5 million CMOS
Resolution	1280*720
Video format	H.264
Frame Rate	30fps
Angle of view	140 degrees Celsius
Motion detection camera distance	Straight 6 meters
Minimum illumination	1LUX
Battery capacity	4800MA
Continuous recording time	Over 20 hours
Remote control Distance	18m
Recording range	40m ²
Power	200MA/3.7V
Storage Temperature	-20-80 degrees Celsius
Operating temperature	-10-60 degrees Celsius
Operating humidity	15-85%RH
Memory card type	TF
Memory card's maximum support capacity	32GB
Play software	Media player/KMplayer
USB interface	USB1.1/2.0
Operating system	2000/XP/Visat32
Memory consumption	1GB/30 minutes
Charging time	About 4 hours

V. Note

Using occasion: Please strictly comply with the relevant state regulations, shall not use this product for other illegal purposes, otherwise the consequence is proud. Software upgrade: in order to make the products with better performance, manufacturers will continue to improve the product software, the product has the convenient client software upgrade features, please ask the local dealer for new version of the software and information updating method.

时尚安防LED台灯说明书




本用户手册将详细说明如何使用本产品,同时提供给您详细的信息,包括使用、操作。使用前请仔细阅读本手册并完全理解。请妥善保存本手册,我们希望本产品能满足您的需求并长期服务于您!

产品保证
本产品经FCC & Ce等权威机构认证符合推荐指标,顾客使用具有安全保证。

一、录影安防夜灯产品简介

本产品是一款外置TF卡存储器的高清30帧(1280x720),H.264格式遥控摄像监控夜灯,集摄像、录音、移动侦测、网络聊天、夜灯、存储于一身的多功能高科技新产品。本产品配备高容量电池,可供20小时以上连续录像、30小时以上连续录音,长达14天的移动侦测监控。500万像素清晰录像,录音、夜灯。最高支持32GB TF卡,可供长时间工作,遥控操作更方便。隐蔽性强,是居家防盗、监控取证的最佳工具。

二、产品结构

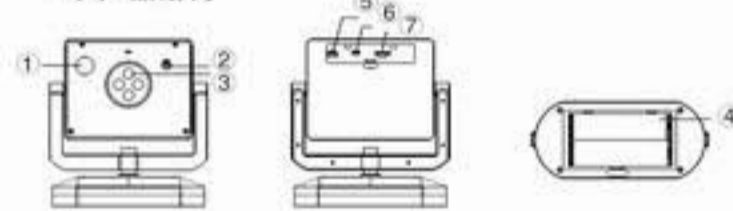

- 1 500万像素摄像头
- 2 遥控接收头
- 3 F10LED灯
- 4 电池仓
- 5 USB接口
- 6 电源开关
- 7 TF卡槽

三、操作说明

- 1、打开后盖,插入TF卡,开启"ON"开机
- 2、用遥控器对准本机接收头轻按 () 开机,蓝灯亮,进入待机状态。(无卡蓝灯快闪十秒关机)
- 3、按 () 进入录像,蓝灯闪三下后自灭进入工作状态,(7分钟一段) 停止按 (),蓝灯亮
- 4、按 () 进入录音,蓝灯闪二下后自灭进入工作状态,(30分钟一段), 停止按 (),蓝灯亮
- 5、按 () 进入拍照 蓝灯慢闪一次
- 6、移动侦测 按 () 蓝灯闪三下进入自动感应摄像功能, 停止按 (),蓝灯亮
- 7、任何状态下按一下 () 夜灯亮,再按一下夜灯灭。
- 8、按 () 关机,蓝灯灭
- 9、在机器处于ON状态下,先插入USB线然后遥控开机。此时机器进入U盘模式。

10、网络摄像功能使用:在使用前请按步骤先安装光盘中的驱动软件;装完驱动后,机器在ON状态下并用遥控先打开 (),插入USB线连接电脑。此时进入PC CAM模式

11、充电:在总开关拨到OFF一端时,插入USB充电器,此时红灯亮,充满后红灯灭。使用电脑USB也同样可以充电。

12、复位:当产品因非法操作或其它未明原因停止响应时,把拨动开关打到OFF状态。然后再打到ON就可以对本产品进行复位。

13、当电池低电量时,蓝灯会不停闪烁,此时应马上充电。当无电时,文件会自动保存。

14、时间设置:在本机的内存卡上新建一个名为"time"的文本档,进入文本档将当前的年月日时间编译到文本档内,中间以空格键隔开。如:2012 06 02 12:00 然后保存这个文档,重新开机录制就是当前编译的时间。

四、文件存储及播放

完成录像等操作后,将开关拨到ON,插上USB数据线,用遥控打开,将里面所存的档复制或剪切到计算机里播放,同时也可将TF卡取出,使用读卡器来读取卡中的文件数据。推荐使用Media player/KM player等播放

像素	500万CMOS
分辨率	1280*720
视频格式	H.264
帧数	30fps
视角	140度
移动侦测摄像距离	直线6米
最小照度	1LUX
电池容量	4800MA
持续录像时间	20小时以上
遥控器距离	18m
录音范围	40m ²
功耗	200MA/3.7V
储藏温度	-20-80摄氏度
操作温度	-10-60摄氏度
操作湿度	15-85%RH
记忆卡类型	TF卡
记忆卡容量最大支持	32GB
播放软件	Media player/KMplayer
等USB界面	USB1.1/2.0
操作系统	2000/XP/Visat32
存储消耗	1GB/30分钟
充电时间	4小时左右

五、注意事项

使用场合:请严格遵守国家相关法令,不得将此产品用于其它非法用途,否则后果自负。软件升级:为了使产品具有更好性能,厂家将不断完善产品软件,本产品具有方便客户自己升级软件的特点,请向当地经销商索取最新版本软件的信息以及升级方法。